



Design Radiators by ISAN

Gala

The Gala radiator is the epitome of power and modern design. Its robust structure made of solid steel sections will lend a distinctive and timeless look to any interior space. Its shape makes it equally suited for bathrooms, entrance halls, corridors as well as living quarters, where it will become a dominant feature.



bath accessories
→ 145



connection sets
→ 146



electric regulators
→ 154



colour ref. chart
→ 159





Gala



Code Height (H) / Length (L) [mm]	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power input [W]	Connection span [mm]	White colour RAL 9016	Electric
DGAL 1155 0500	30	15,7	8,8	1,279	507	600	50/430	✓	✓
DGAL 1155 0600	30	18,0	10,4	1,279	596	600	50/530	✓	✓
DGAL 1330 0280	30	11,3	6,3	1,279	353	400	50/210	✓	✓
DGAL 1465 0500	30	19,8	11,2	1,279	644	600	50/430	✓	✓
DGAL 1465 0600	30	22,5	12,9	1,279	756	800	50/530	✓	✓
DGAL 1750 0280	30	14,7	8,2	1,275	461	400	50/210	✓	✓
DGAL 1775 0500	30	23,5	13,4	1,275	768	800	50/430	✓	✓
DGAL 1775 0600	30	27,3	15,5	1,275	902	1000	50/530	✓	✓

For ordering procedure see page 160 / The weight of radiators does not include water and packaging.

Technical information


Material	steel profiles 70×30 mm steel profiles horizontally 70×30 mm
Connection threads	4 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C

Modification options

Surface treatment	colour
Height range [mm]	NO
Length range [mm]	NO
Electric version	YES (additional charge)
Universal connection (SU)	STANDARD
Side connection (SB)	NO
One-sided into space fixing	NO


Type height (H) / length (L) [mm]

NEW PRODUCTS

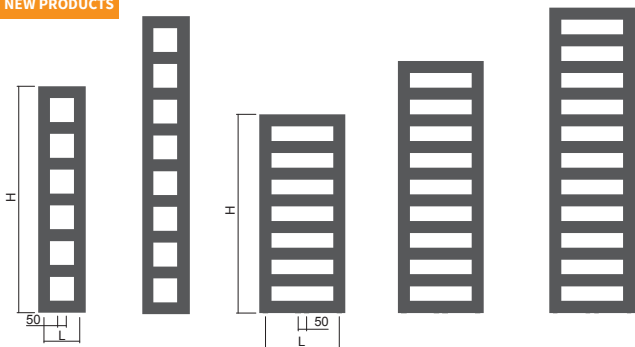

H 1330	H 1750	H 1155	H 1465	H 1775
L 0280	L 0280	L 0500, 0600	L 0500, 0600	L 0500, 0600

Mounting



Type	X [mm]	A [mm]
Metal brackets	55-65	70-80

Connection options



The type of connection must be specified in the order; for more information see page 160, positions 13 and 14.



New dimension