



Design Radiators by ISAN

Miro

with middle connection

The innovative Miro radiator with open sections for easy fabric hanging and warming. Improved manufacturing technology removes the need for stability reinforcements. The radiator now comes in a clean design, is more elegant and at the same time more practical than before. You can choose from a right or left arrangement available in several height and width options. The Miro radiator can be utilized both in central heating systems and for electric heating. The units are available in a wide range of colours as per the ISAN colours chart with smooth, metallic or structured colours surfaces.



bath accessories
→ 145




connection sets
→ 146



electric regulators
→ 154



colour ref. chart
→ 159

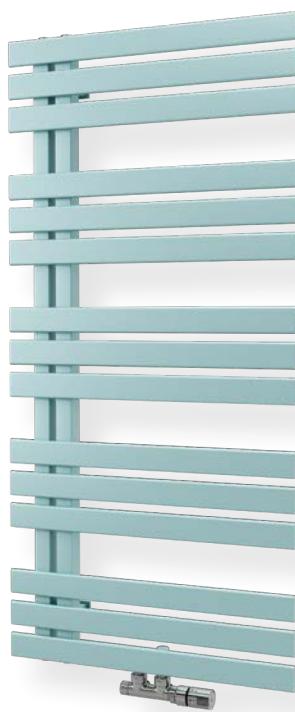

Code Height (H) / Length (L) [mm]	Depth (B) [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [-]	Output 75/65/20°C [W]	Power input [W]	Connection span [mm]	White colour RAL 9016	Electric
DMIR / DMIL 0972 0500	45	11,0	3,9	1,348	395	400	50	✓	-
DMIR / DMIL 0972 0600	45	12,5	4,3	1,348	446	400	50	✓	-
DMIR / DMIL 1236 0500	45	13,8	5,0	1,348	496	600	50	✓	-
DMIR / DMIL 1236 0600	45	15,7	5,5	1,348	560	600	50	✓	-
DMIR / DMIL 1500 0500	45	16,6	6,0	1,323	602	600	50	✓	-
DMIR / DMIL 1500 0600	45	18,9	6,6	1,323	680	800	50	✓	-
DMIR / DMIL 1764 0500	45	19,4	7,0	1,298	697	800	50	✓	-
DMIR / DMIL 1764 0600	45	22,1	7,7	1,298	787	800	50	✓	-

For ordering procedure see page 160 / The weight of radiators does not include water and packaging.


Technical information

Material	steel profiles 35x35 mm steel profiles 50x10 mm
Connection threads	4xG1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	12, 15, 18, 21


Modification options

Surface treatment	colour
Height range [mm]	708-1764 (increase of 264)
Length range [mm]	NO
Change of dimensions	additional charge
Electric version	NO
Standard connection (SK)	YES
Middle connection (SM)	STANDARD (code DMIR, DMIL)
Side connection (SB)	NO
One-sided into space fixing	NO

Type height (H) / length (L) [mm]

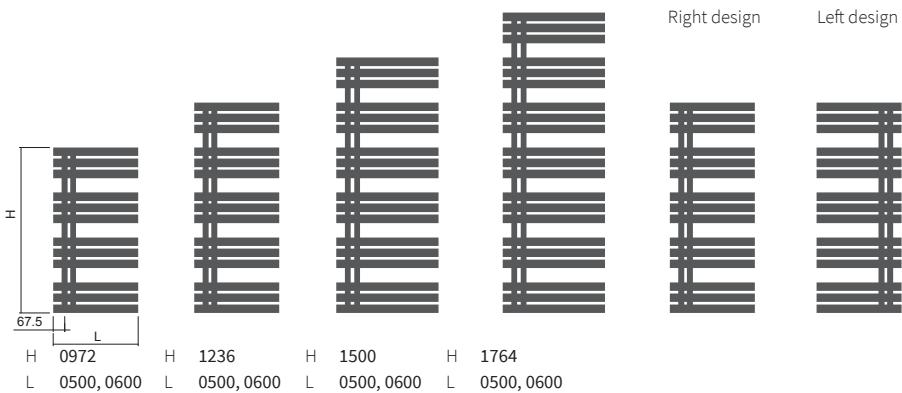

Mounting



Type	X [mm]	A [mm]
Metal brackets	58-68	90-100

Connection options



The type of connection must be specified in the order; for more information see page 160, positions 13 and 14.