


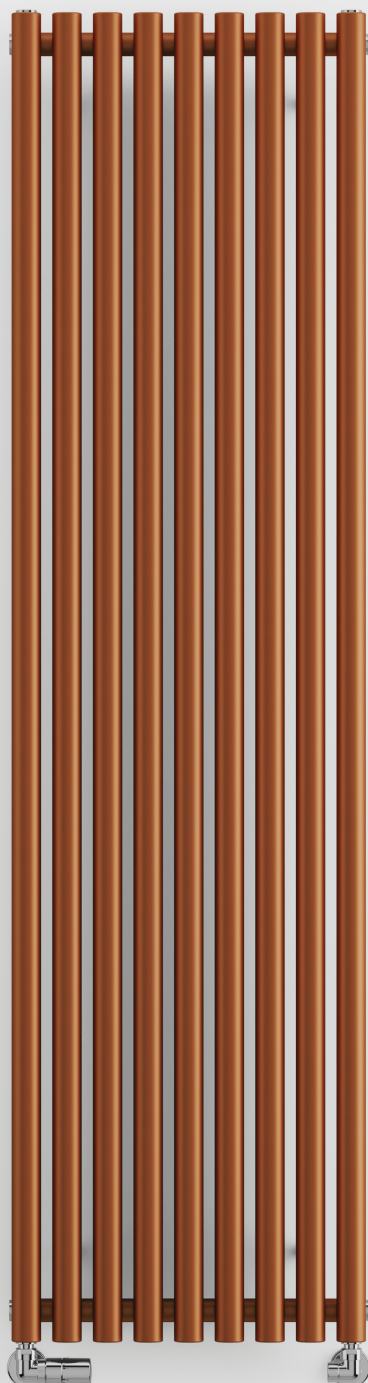

◀ **Radiator**


ROLO ROOM 1800 ↑ x 480 ↔ SX,
radiator colour: True Copper,
radiator code: WGROR180048 KTCGSX

Valves and accessories



















3-axis regulating valve set, chrome

ROLO ROOM





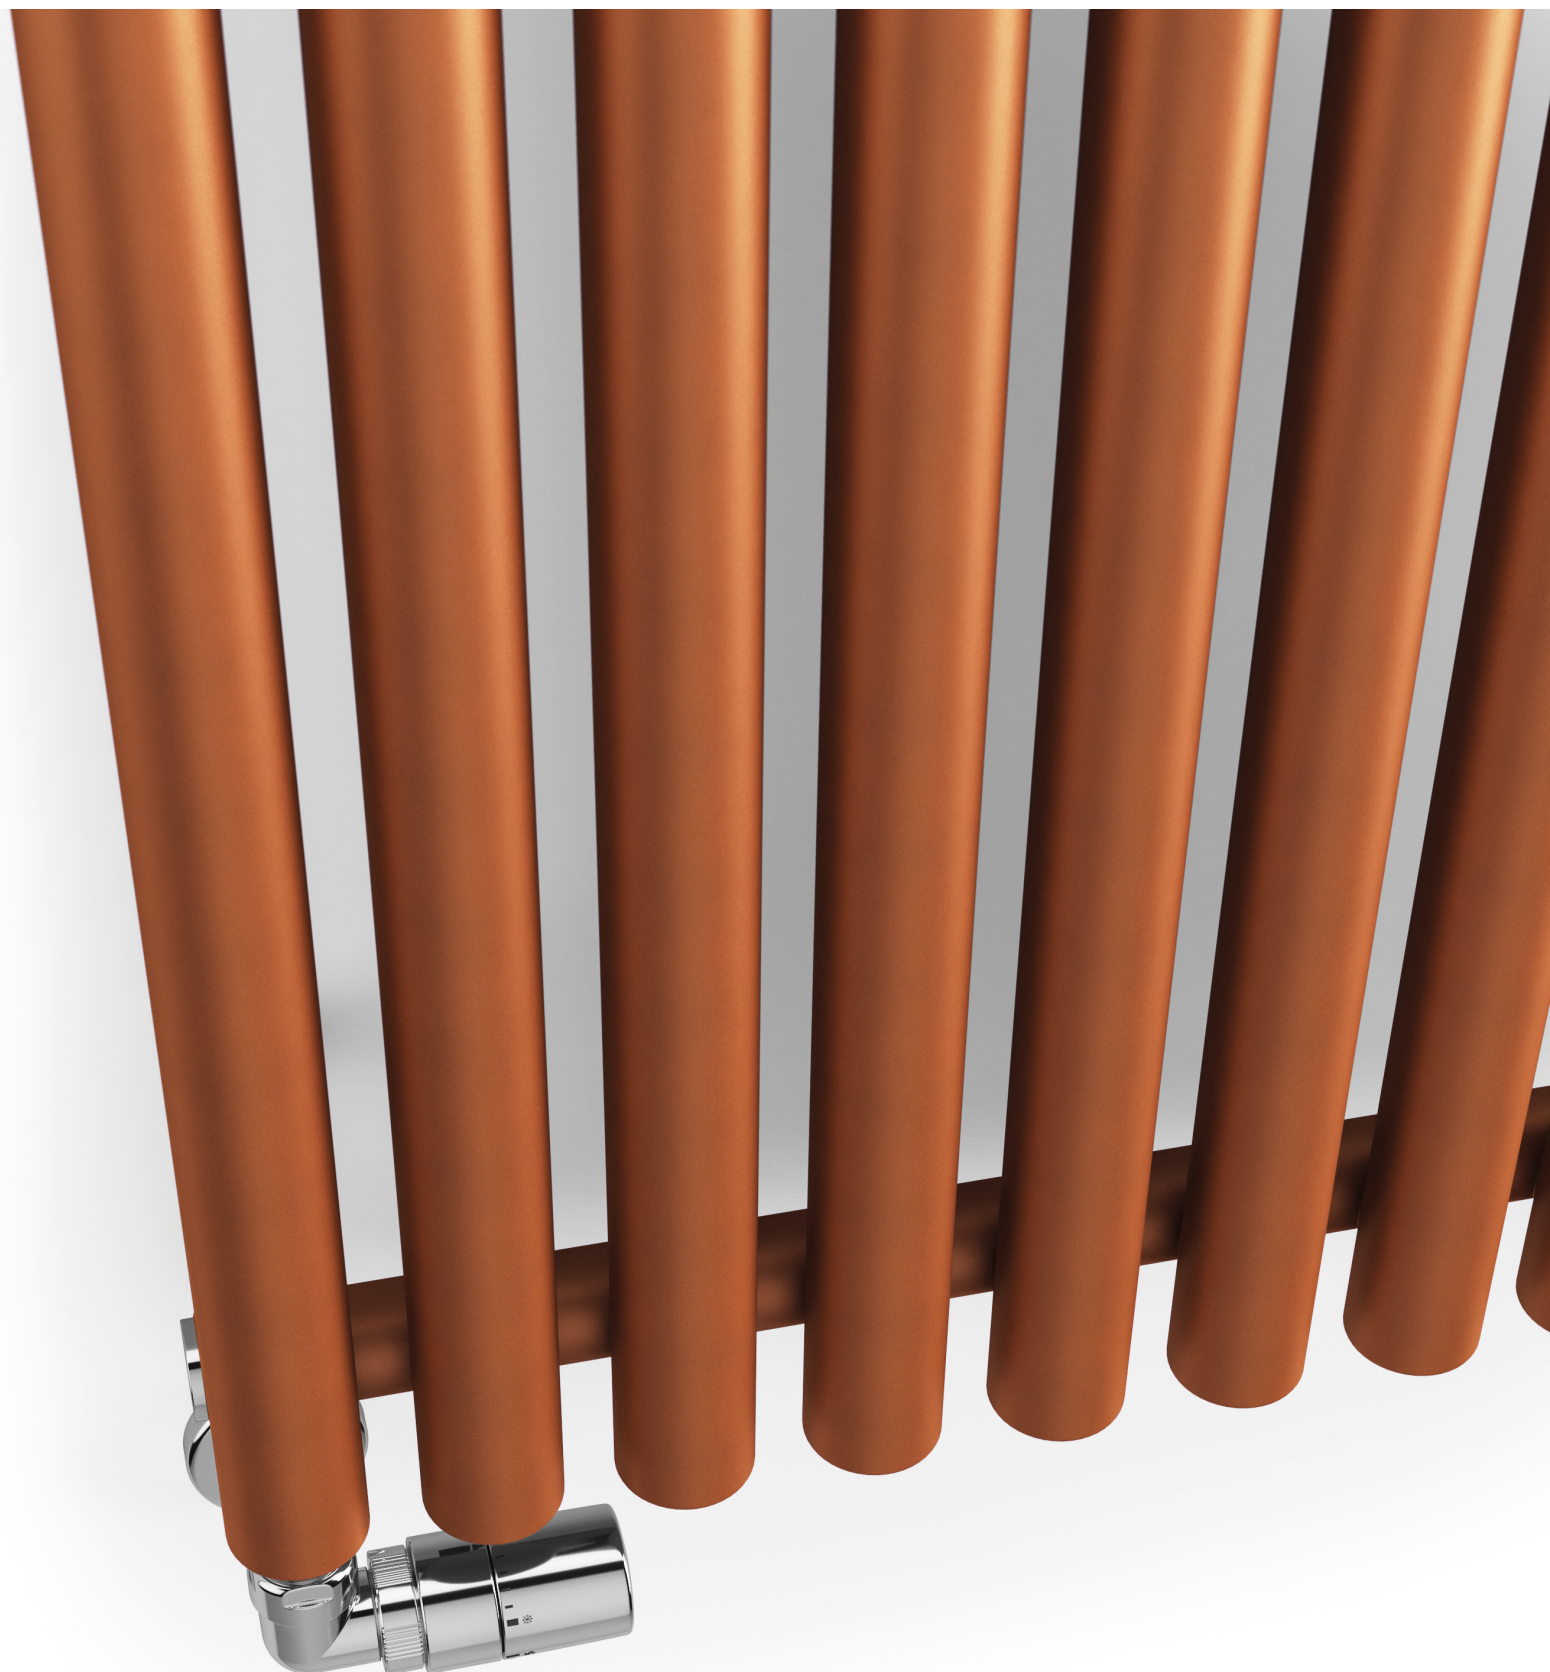

AVAILABLE SIZES

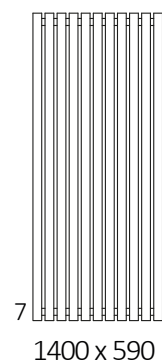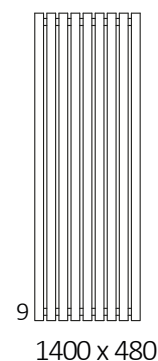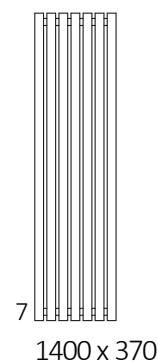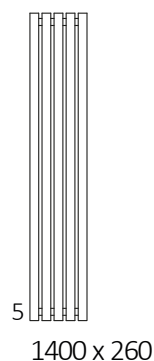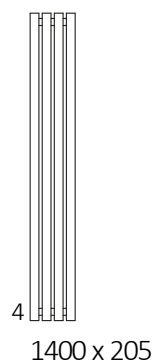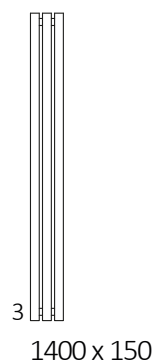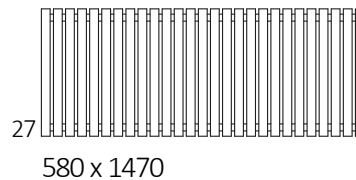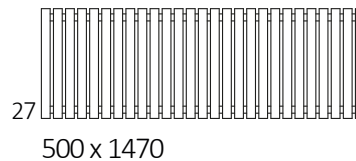


AVAILABLE SIZES

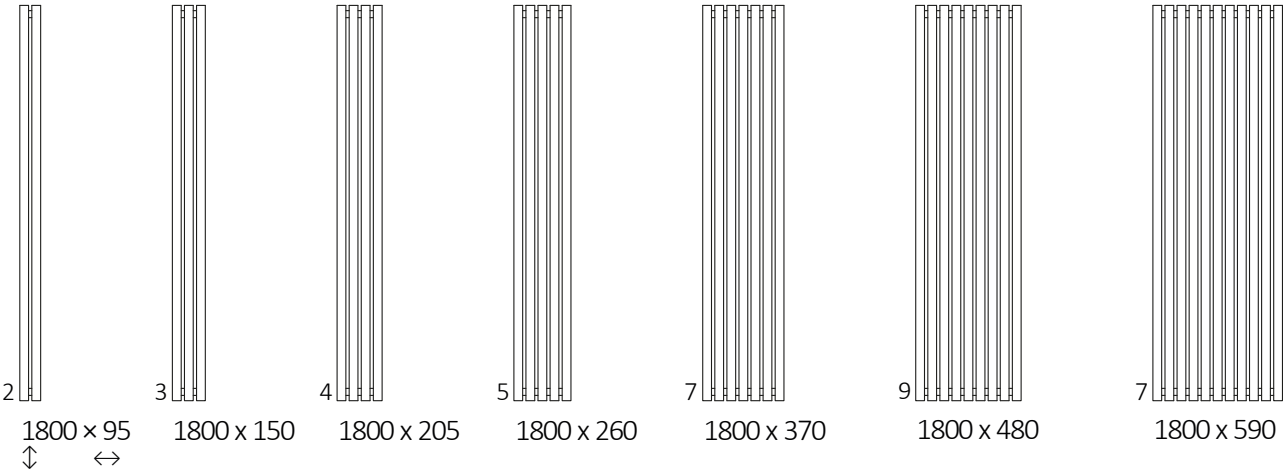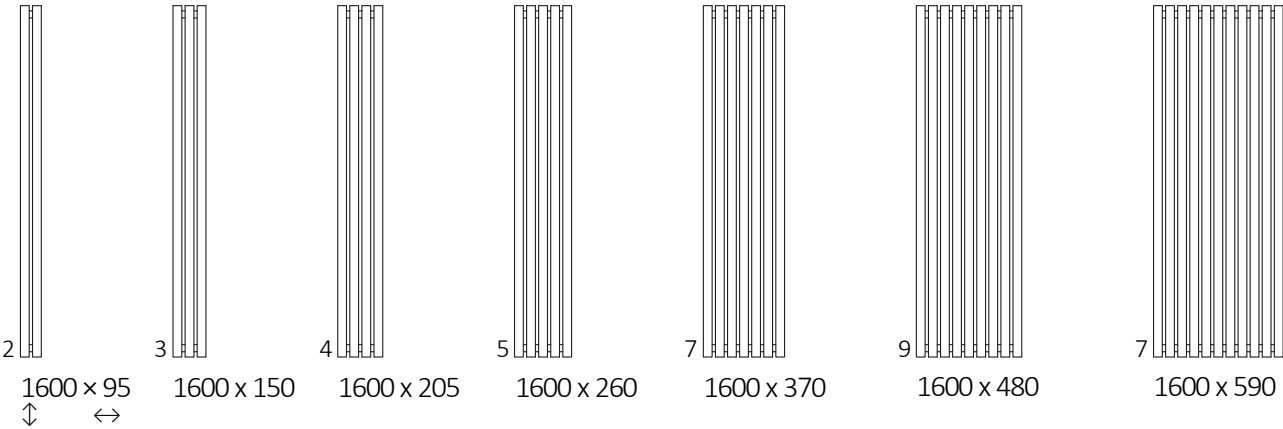

CENTRAL HEATING

Connections

A $\updownarrow$ 500÷1800A $\updownarrow$ 500÷580

Height A $\updownarrow$ [mm]	Width B $\leftrightarrow$ [mm]	Heating power			Product code ... Configuration p. 11
		75/65/20°C [W]	55/45/20°C [W]	 [W]	
500	865	591	310	600	WGROR050086...
500	1195	812	426	800	WGROR050119...
500	1470	997	523	1000	WGROR050147...
580	865	672	334	800	WGROR058086...
580	1195	924	459	1000	WGROR058119...
580	1470	1134	563	1200	WGROR058147...
1200	95	162	82	200	WGROR120009...
1200	150	242	122	300	WGROR120015...
1200	205	323	163	300	WGROR120020...
1200	260	404	204	400	WGROR120026...
1200	370	565	285	600	WGROR120037...
1200	480	726	366	800	WGROR120048...
1200	590	888	447	800	WGROR120059...
1400	95	183	92	200	WGROR140009...
1400	150	275	138	300	WGROR140015...
1400	205	367	184	400	WGROR140020...
1400	260	459	230	400	WGROR140026...
1400	370	642	322	600	WGROR140037...
1400	480	825	414	800	WGROR140048...
1400	590	1009	506	1000	WGROR140059...
1600	95	195	97	200	WGROR160009...
1600	150	310	155	300	WGROR160015...
1600	205	413	206	400	WGROR160020...
1600	260	517	258	600	WGROR160026...
1600	370	723	361	800	WGROR160037...
1600	480	930	464	1000	WGROR160048...
1600	590	1136	567	1200	WGROR160059...
1800	95	237	118	300	WGROR180009...
1800	150	356	177	400	WGROR180015...
1800	205	474	235	600	WGROR180020...
1800	260	573	284	600	WGROR180026...
1800	370	802	398	800	WGROR180037...
1800	480	1031	512	1000	WGROR180048...
1800	590	1260	625	1200	WGROR180059...


DIMENSIONS AND TECHNICAL INFORMATION

Working pressure: 1000 kPa

Maximum operating temperature: 95°C


Height A $\updownarrow$ [mm]	Width B $\leftrightarrow$ [mm]	Spacing connection C2 [mm]	Spacing connection C3 [mm]	Spacing horizontal fasteners D [mm]	Spacing vertical fasteners E [mm]	Bottom fasteners position F [mm]	Capacity  [dm ³]	Weight  [kg]
500	865	825	420	715	260	120	9,79	13,97
500	1195	1155	420	1045	260	120	13,47	19,23
500	1470	1430	420	1320	260	120	16,54	23,61
580	865	825	500	715	340	120	11,17	15,87
580	1195	1155	500	1045	340	120	15,36	21,83
580	1470	1430	500	1320	340	120	18,86	26,79
1200	95	55	1120	55	960	120	2,71	3,99
1200	150	110	1120	110	960	120	4,08	5,90
1200	205	165	1120	165	960	120	5,44	7,81
1200	260	220	1120	220	960	120	6,81	9,51
1200	370	330	1120	330	960	120	9,54	13,33
1200	480	440	1120	440	960	120	12,27	17,15
1200	590	550	1120	550	960	120	15,00	20,97
1400	95	55	1320	55	1160	120	3,14	4,58
1400	150	110	1320	110	1160	120	4,72	6,79
1400	205	165	1320	165	1160	120	6,30	8,99
1400	260	220	1320	220	1160	120	7,88	11,20
1400	370	330	1320	330	1160	120	11,05	15,61
1400	480	440	1320	440	1160	120	14,21	20,02
1400	590	550	1320	550	1160	120	17,37	24,41
1600	95	55	1520	55	1360	120	3,57	5,17
1600	150	110	1520	110	1360	120	5,37	7,68
1600	205	165	1520	165	1360	120	7,16	10,17
1600	260	220	1520	220	1360	120	8,96	12,67
1600	370	330	1520	330	1360	120	12,55	17,67
1600	480	440	1520	440	1360	120	16,14	22,67
1600	590	550	1520	550	1360	120	19,74	27,67
1800	95	55	1720	55	1560	120	4,00	5,82
1800	150	110	1720	110	1560	120	6,01	8,66
1800	205	165	1720	165	1560	120	8,02	11,51
1800	260	220	1720	220	1560	120	10,03	13,94
1800	370	330	1720	330	1560	120	14,06	19,53
1800	480	440	1720	440	1560	120	18,08	25,12
1800	590	550	1720	550	1560	120	22,10	30,71

TECHNICAL DRAWING

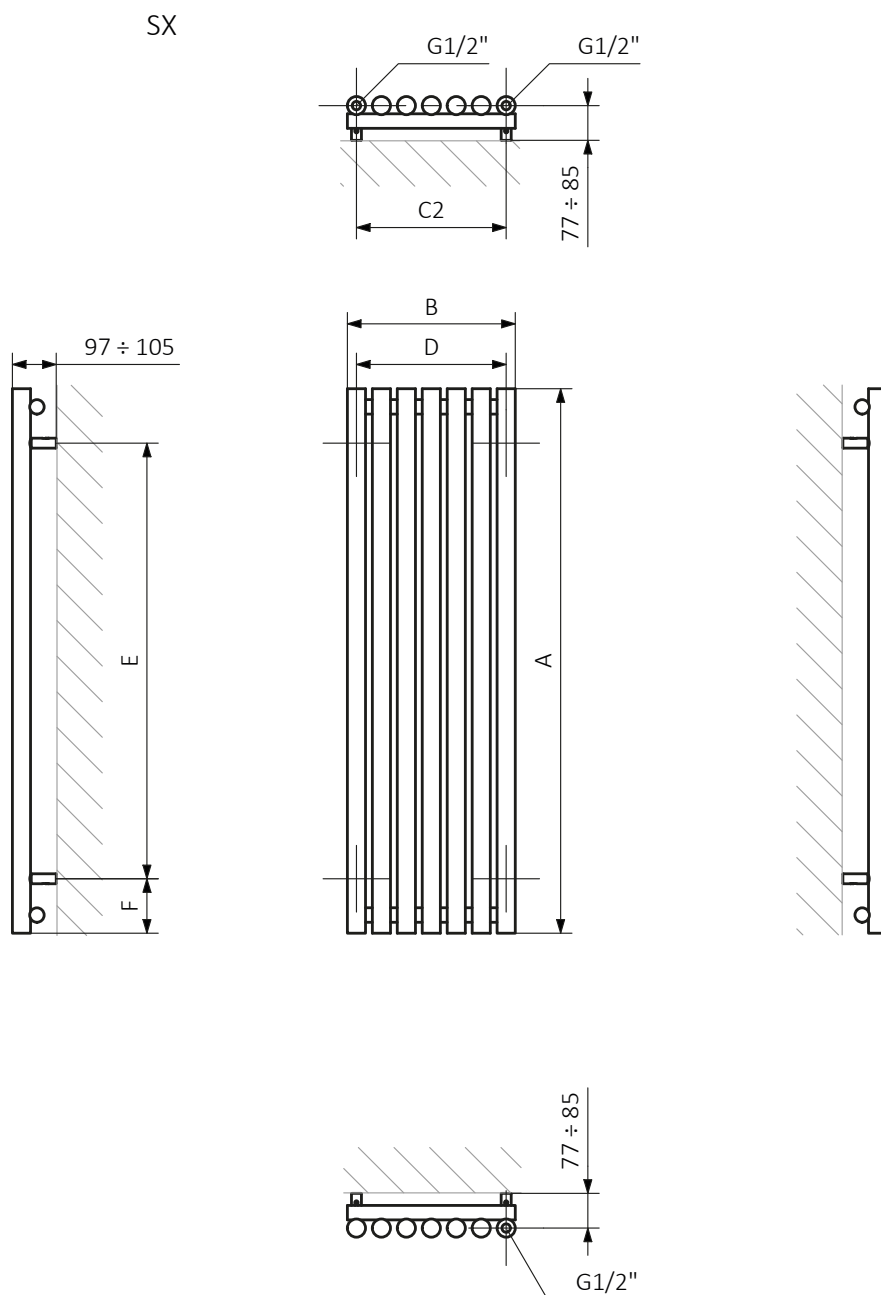




A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector: **Pipe:**




TECHNICAL DRAWING

PX

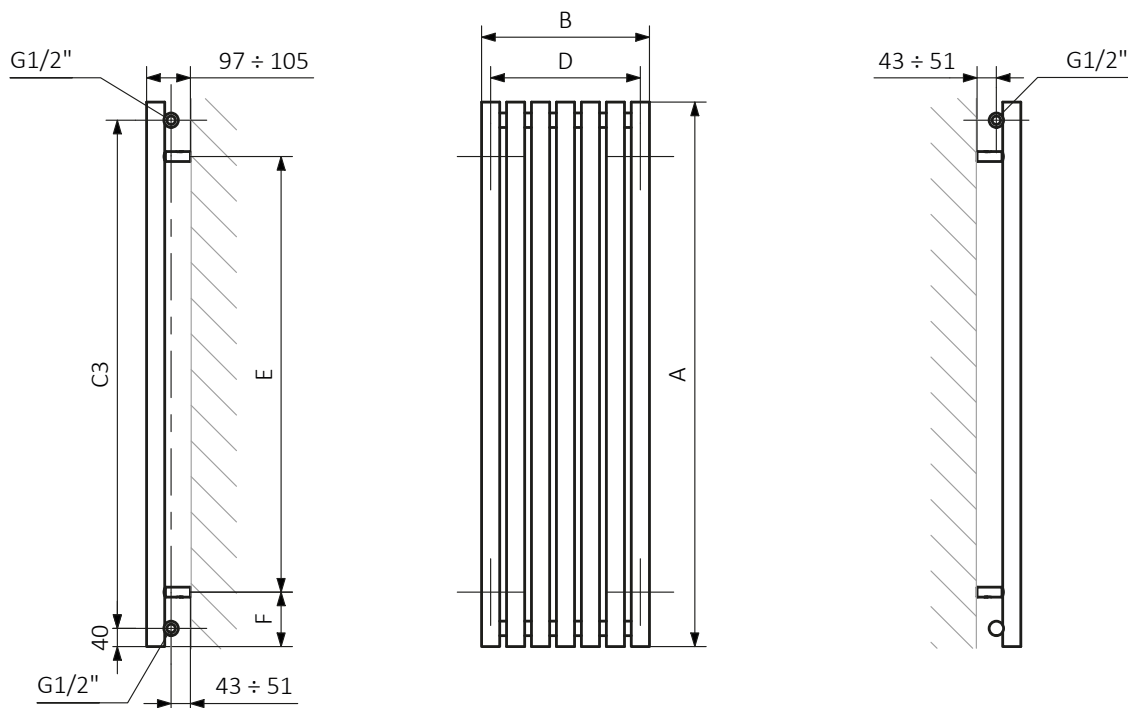


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector: **Pipe:**




TECHNICAL DRAWING

LX

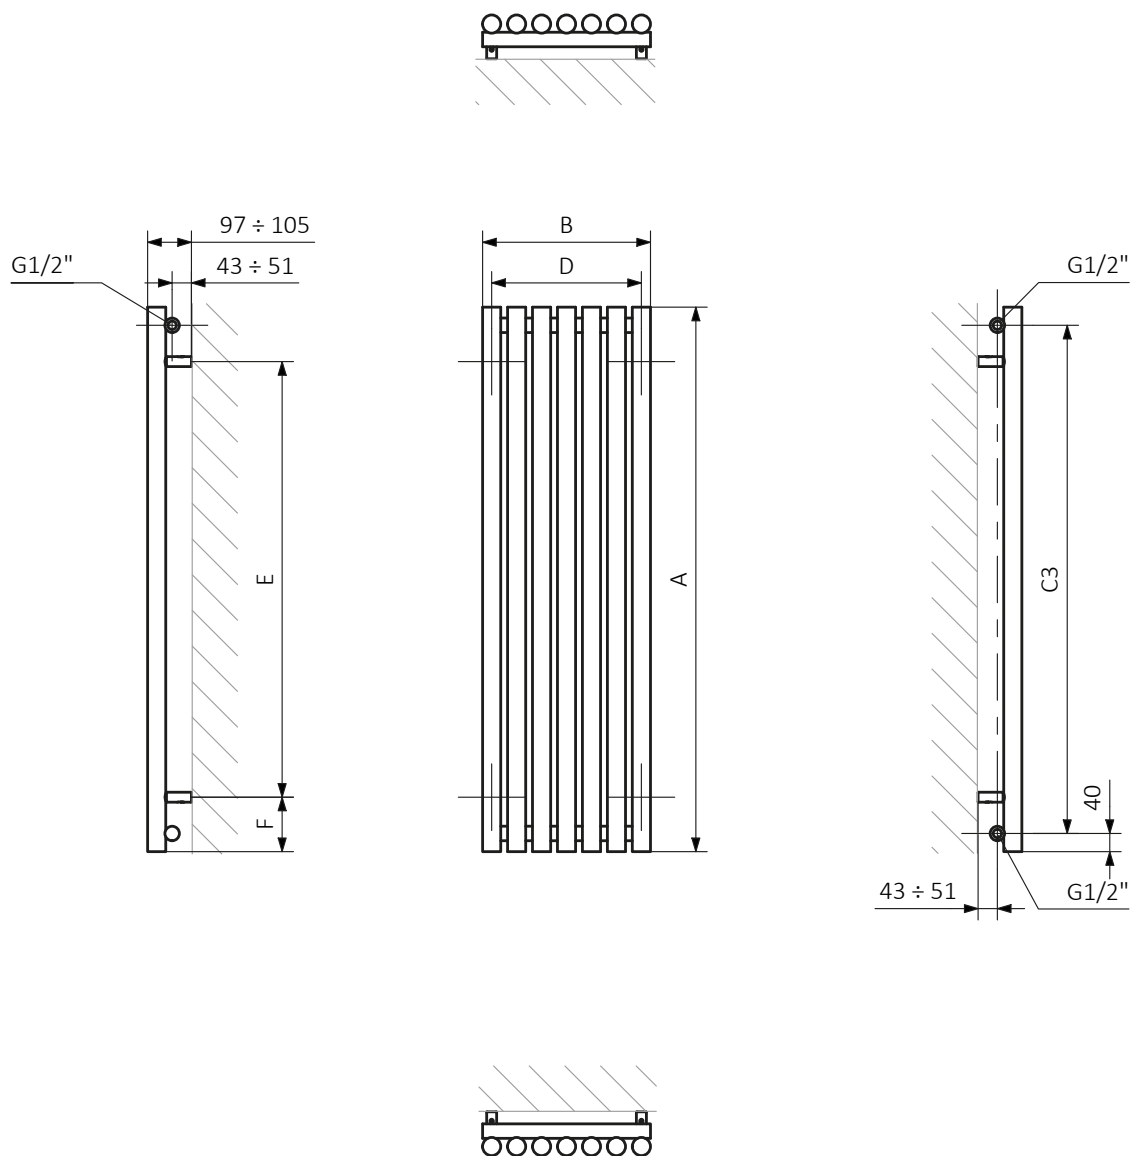


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector: **Pipe:**




TECHNICAL DRAWING

LP

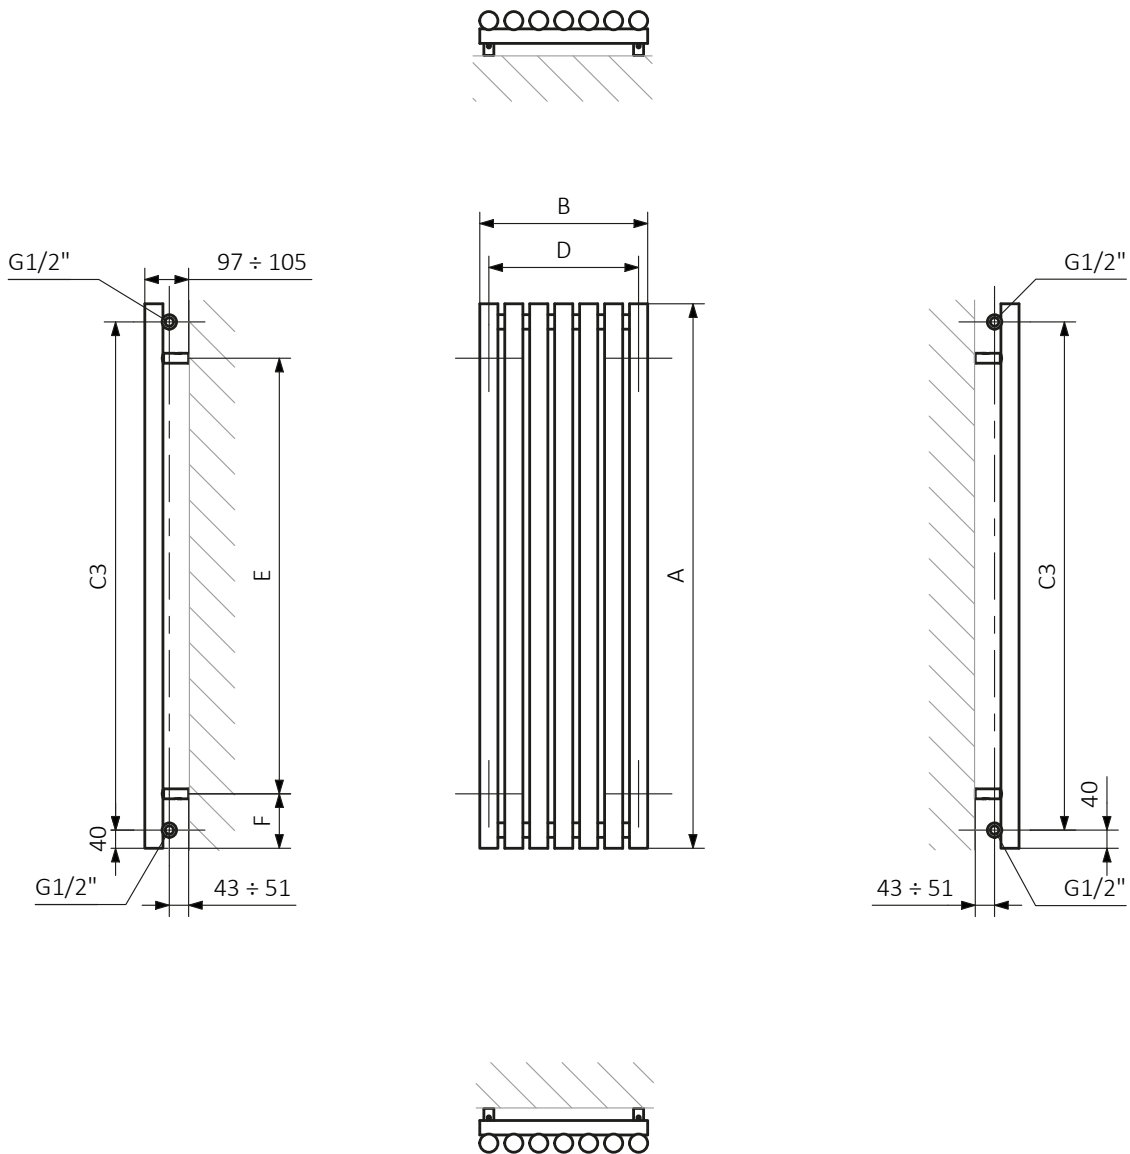

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator


Collector: Pipe:



CONFIGURATION CODE FOR A TOWEL RAIL OR RADIATOR ("WG" PRODUCT GROUP)

Product codes can be found in the product tables in both the catalogue and the price list. They provide basic information about the product and the configuration code contains information that complements the specification. When placing an order, the product codes should contain the fully completed configuration part. Part of the configuration code should be placed after the main product code as shown in the example below:

CODE DETAILS:

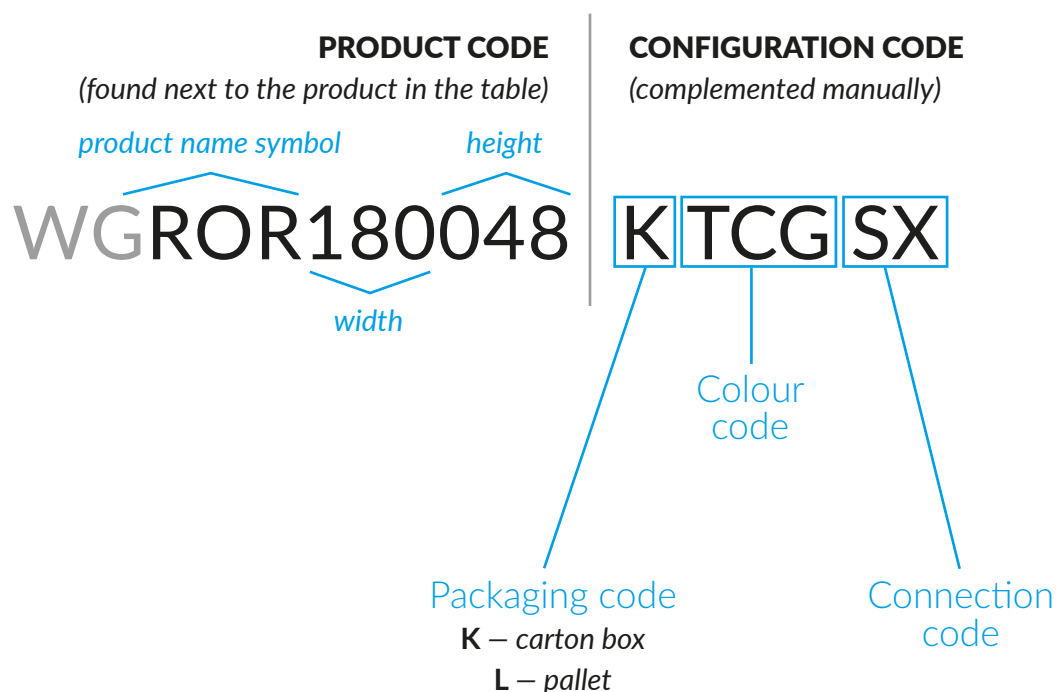

WG – water or dual fuel, central heating towel rail or radiator